


Technical Specifications IP 17

Sensitivity (2.83 V/1 m):	88 dB
IEC Long Term Power Handling:	150 watts
Impedance, Nominal:	8 ohms
Frequency Response: (± 3 dB)	45 Hz – 23 kHz
Dimensions (W x H):	225 x 325 mm (8.86" x 12.80")
Recommended Placing:	In-Wall
Remarks:	<ul style="list-style-type: none"> • 28 mm soft dome tweeter, 16.5 cm MSP woofer • audiophile grade crossover • gold plated terminals • adjustable tweeter level, $\pm 1,5$ dB • 15 mm thick MDF baffle • Aluminium frame and grille – corrosion free, painted semi-white (RAL 9003, paintable)

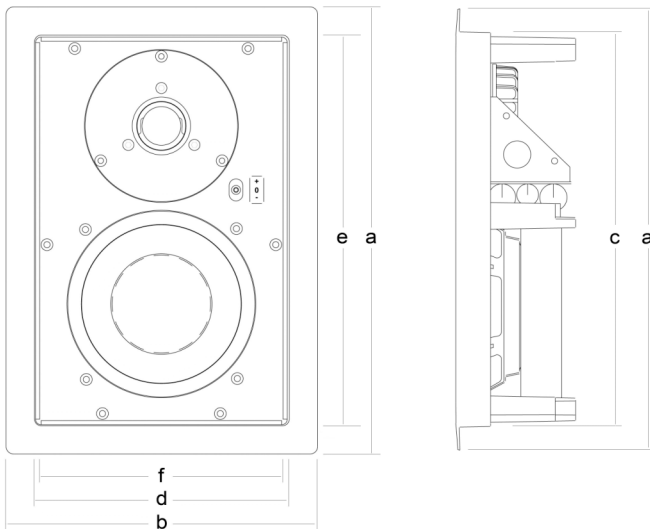

Aluminium mounting frame:	a	Height:	325 mm (12.80")
	b	Width:	225 mm (8.86")
Cut Out:	c	Height:	295 mm (11.61")
	d	Width:	194 mm (7.64")
Grille:	e	Height:	285 mm (11.22")
	f	Width:	185 mm (7.28")
Minimum depth required:			92 mm (3.62")
Minimum cavity volume:			15 liters (0.53 ft ³)