


Technical Specifications IP 24

Sensitivity (2.83 V/1 m):	90 dB
IEC Long Term Power Handling:	150 watts
Impedance, Nominal:	4 ohms
Frequency Response: (± 3 dB)	40 Hz – 23 kHz
Dimensions (W x H):	286 x 385 mm (11.25" x 15.15")
Recommended Placing:	In-Wall
Remarks:	<ul style="list-style-type: none"> • 28 mm soft dome tweeter, 24 cm MSP woofer • audiophile grade crossover • gold plated terminals • adjustable tweeter level, $\pm 1,5$ dB • 15 mm thick MDF baffle • Aluminium frame and grille – corrosion free, painted semi-white (RAL 9003, paintable)

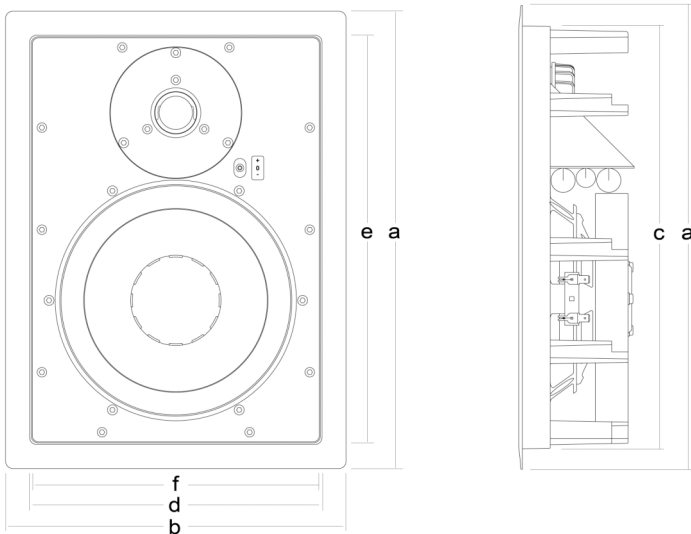

Aluminium mounting frame:	a Height:	385 mm (15.15")
	b Width:	286 mm (11.25")
Cut Out:	c Height:	351 mm (13.82")
	d Width:	252 mm (9.92")
Grille:	e Height:	343 mm (13.50")
	f Width:	244 mm (9.60")
Minimum depth required:		92 mm (3.62")
Minimum cavity volume:		30 liters (1.1 ft ³)